

PRODUCT DATASHEET

CFL SQUARE 28 W/835 GR10Q

OSRAM CFL SQUARE 4 pins | Square CFLni with 4-pin GR10q base for ECG/CCG operation



AREAS OF APPLICATION

- Low-profile wall and ceiling luminaires
- Public buildings, reception areas, offices, corridors, etc.
- Shops
- Supermarkets and department stores
- Hotels, restaurants

PRODUCT BENEFITS

- Square shape provides uniform distribution of light
- No shadows at either end and no dark patches
- Very economical
- Extremely low profile
- Good quality of light
- Long service life

PRODUCT FEATURES

- Short and compact pin-base lamp with double-turn tubes
- Single-ended four-pin plug-in GR10q base
- Color rendering index $R_a \geq 80$



TECHNICAL DATA


Electrical data

Nominal voltage	220 V
Rated wattage	28.00 W
Nominal wattage	28.00 W
Nominal current	0.32 A

Photometrical data

Nominal luminous flux	2050 lm
Luminous flux at 25 °C	2050 lm
Rated luminous flux	2050 lm
Rated color temperature	3500 K
Color rendering index Ra	≥80
Rated LLMF at 4,000 h	0.88
Rated LLMF at 6,000 h	0.85
Rated LLMF at 8,000 h	0.82
Rated LLMF at 12,000 h	0.78
Light color (designation)	LUMILUX White
Color temperature	3500 K
Luminous flux	2050 lm
Color rendering index Ra	≥80

Dimensions & weight

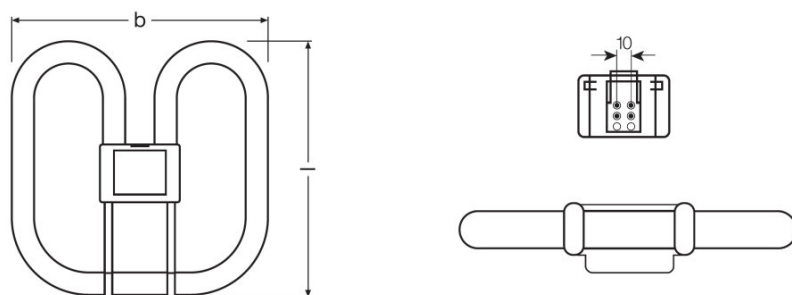

Overall length	205.0 mm
Length	205.0 mm ¹⁾
Length acc. to IEC standard	205 mm
Outer bulb	T12
Maximum diameter	17.0 mm

¹⁾ Maximum

Lifespan

Nominal lamp life time	13000 h
Rated lamp life time	13000 h
Service life	7500 h ¹⁾
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.95
Rated lamp survival factor at 8,000 h	0.88
Rated lamp survival factor at 12,000 h	0.59
Operation mode LLMF/LSF	HF
Lifespan	13000 h

¹⁾ With preheat ECG

Additional product data

Base (standard designation)	GR10q
Mercury content	2.5 mg

Capabilities

Suitable for indoor	Yes
---------------------	-----

Certificates & standards

Energy consumption	31 kWh/1000h
Energy efficiency class	A

Country-specific categorizations

ILCOS	FSS-28/835-E-GR10q
-------	--------------------