


PRODUCT DATASHEET

HALOLINE 1500 W 230 V R7S

HALOLINE® Standard | Double ended halogen lamps with tube base

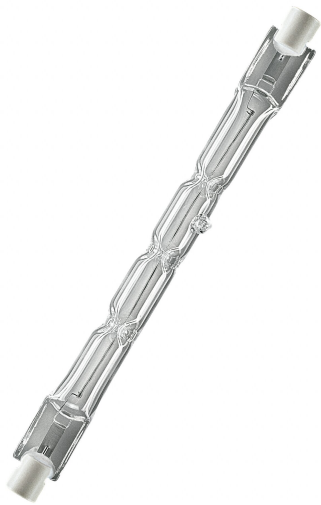

Areas of application

- Ideal for emphasizing and accentuating buildings
- General illumination
- Entrance lighting
- Pathway lighting
- Garden lighting
- Traffic areas
- Shops
- Restaurants, hotels and similar prestigious applications
- Outdoor applications only in suitable luminaires

Product benefits

- Brilliant accent light
- No transformer required
- Contains no mercury

Product features

- Average life: 2,000 h
- 100 % dimmable
- Color rendering index R_a : 100
- Color temperature: 3,000 K
- Burning position: p15


TECHNICAL DATA

Electrical data

Nominal wattage	1580.00 W
Construction wattage	1580.00 W
Nominal voltage	230 V

Photometrical data

Luminous flux	33730 lm
Luminous efficacy	21 lm/W
Light color (designation)	Warm White
Color temperature	2900 K
Color rendering index Ra	100
Light color	1029
UV protection	No



Light technical data

Starting time	0 s
Rated beam angle (half peak value)	360.00 °

Dimensions & Weight

Overall length	250.70 mm
Diameter	12 mm
Product weight	22.92 g

Lifespan

Lifespan	2000 h
----------	--------

Additional product data

Base (standard designation)	R7s
Mercury-free	Yes
Design / version	Tube

Product remark	Fuse protection with indicated values recommended acc. to IEC60357, EN60357 / For outdoor applications and operation in damp locations special approved fixtures are required
----------------	---

Capabilities

Dimmable	Yes
Burning position	p15

Certificates & Standards

Energy efficiency class	G
Energy consumption	1580.00 kWh/1000h

Country-specific categorizations

ILCOS	HDG-1500-230-R7s-256,1
Order reference	64760 1580W 230

Energy labelling regulation data acc EU 2019/2015

Lighting technology used	OTHER
Non-directional or directional	NDLS
Mains or non-mains	MLS
Light source cap-type (or other electric interface)	R7s
Connected light source (CLS)	No
Color-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Correlated colour temperature type	SINGLE_VALUE
Claim of equivalent power	No
Length	256.10 mm
Height	12 mm
Width	12 mm
Chromaticity coordinate x	0.444
Chromaticity coordinate y	0.406
Beam angle	SPHERE_360
EPREL ID	714419
Model number	AC35335,AC35335

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
--------------	------------------------------	--------------------------------------	--------------	--------