


HMP 575W SE Metal Halide Lamps

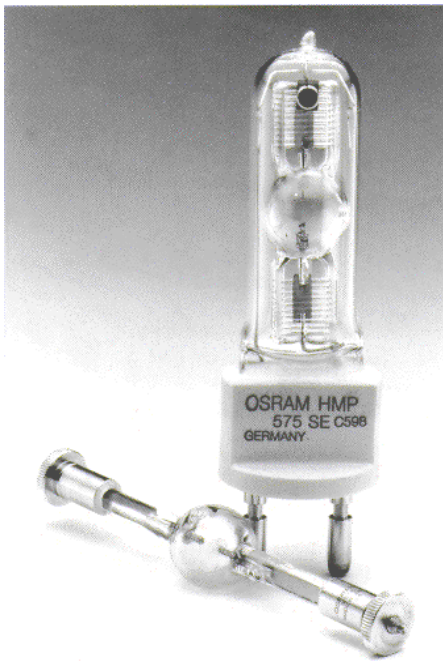

- Long lamp life
- High luminance, improved maintenance
- Optimized spectral distribution for OHP/LCD applications
- Rugged lamp design for portable systems
- "Super Dim'n Boost" technology

TECHNICAL DATA

Lamp order reference	HMP 575 SE	
Rated wattage (W)	(W)	575
Dim and boost range (W)	(W)	400...700
Rated voltage (V)	(V)	100
Rated current ~ (A)	(A)	6.7
Service life (h)	(h)	1,000
Base		G22
Luminous flux (lm)	(lm)	49,000
Color temperature (K)	(K)	6000
Length l (mm)	(mm)	145
LCL a (mm)	(mm)	70
Arc length (mm)	(mm)	7
Diameter d (mm)	(mm)	30
Operating position		Any

APPLICATION INFORMATION

Applications

- Projection applications
- Overhead projection
- Special effect lighting

WARNING

HMP lamps emit a high level of ultraviolet (UV) radiation and operate at high pressure. Before use, read the complete warning accompanying the product.

Disposal

When disposing of spent lamps, always consult federal, state, local and provincial hazardous waste disposal rules and regulations to ensure proper disposal.

ORDERING INFORMATION


Lamp description: **HMP 575 W/SE**

NAED-Code: 54145

Standard case quantity: 10/case

TECHNICAL DRAWING

HMP 575 SE

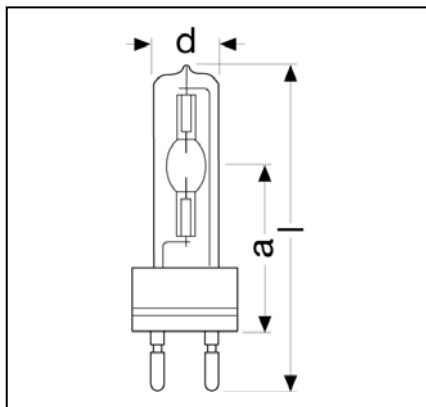

FOR ORDERS AND GENERAL INFORMATION

OSRAM SYLVANIA National Customer Support Center, 18725 N. Union Street, Westfield, IN 46074

Display/Optic

Phone: (888) 677-2627
(888) OSRAMCS
Fax: (800) 762-7192

Special Markets

Phone: (800) 762-7191
Fax: (800) 762-7192

Industrial & Commercial

Phone: (800) 255-5042
Fax: (800) 255-5043