



# Actinic BL PL-S/PL-L

## Actinic BL PL-S 9W/10/2P 1CT/6X10BOX

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

### Product data


General Information		Cap-Base Information	
Cap-Base	G23 [ G23]		2 Pins
Main Application	Phototherapy	<b>UV</b>	
Life to 50% Failures (Nom)	1000 h	UV-B/UV-A (IEC)	0.1 %
Useful Life (Nom)	2000 h	UV-A Radiation 100Hr (IEC)	1.66 W
Light Technical		Product Data	
Color Code	210 [ leadfree 360 glass (10)]	Full product code	871150095194680
Color Designation	Ultra Violet A	Order product name	Actinic BL PL-S 9W/10/2P 1CT/6X10BOX
Chromaticity Coordinate X (Nom)	227	EAN/UPC - Product	8711500951946
Chromaticity Coordinate Y (Nom)	212	Order code	927901721008
UV Depreciation at 2000 h	20 %	Numerator - Quantity Per Pack	1
Operating and Electrical		Numerator - Packs per outer box	60
Power (Rated) (Nom)	8.6 W	Material Nr. (12NC)	927901721008
Lamp Current (Nom)	0.17 A	Net Weight (Piece)	32.000 g
Voltage (Nom)	60 V		
Mechanical and Housing			
Bulb Finish	-		

## Actinic BL PL-S/PL-L

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Dimensional drawing




Product	D1 (max)	D (max)	A (max)	B (max)	C (max)
Actinic BL PL-S 9W/10/2P 1CT/ 6X10BOX	13 mm	28 mm	128.8 mm	144.5 mm	167 mm

PL-S 9W/210/2P

### Photometric data

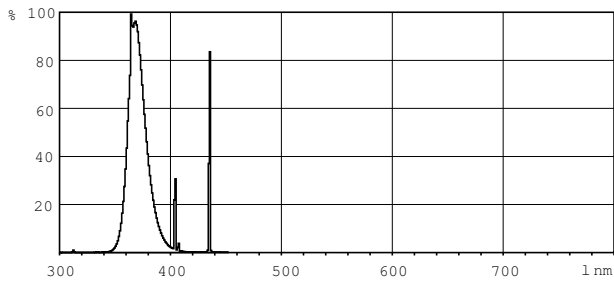

Lightcolor /10, /110 & /210

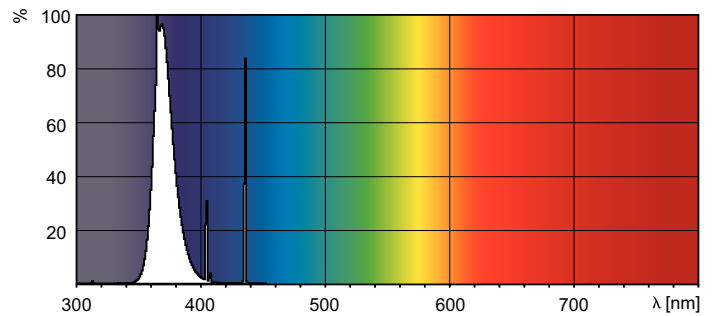

Lightcolor /10, /110 & /210

