



Medical Therapy Jaundice TL/TL-D

TL 20W/52 SLV/25

By emitting light almost entirely within the 400 to 500 nm bandwidth these Medical Therapy Jaundice TL/TL-D /52 lamps have no radiation from the short wave UVB waveband. They are therefore ideal for treating new born babies suffering from hyperbilirubinemia (neonatal jaundice) and Crigler-Najjar Syndrome (CNS). Moreover, the bandwidth of these lamps peak at the most effective treatment wavelength of 450 nm. This highly efficacious phototherapy treatment has eliminated the need for blood transfusions in almost all jaundiced infants. N.B.: Our UVB lamps are NOT registered with FDA as medical devices as they are NOT packaged or labeled for commercial distribution for health-related purposes. US customers are referred to the UVB and UVA lamp range brochure US version.

Product data

General Information		LLMF 2000 h Rated	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]		20 %
Main Application	Medical Therapy	Operating and Electrical	
Life to 50% Failures (Nom)	9000 h	Power (Rated) (Nom)	19.3 W
Useful Life (Nom)	2000 h	Lamp Current (Nom)	0.36 A
Light Technical		Voltage (Nom)	59 V
Color Code	52	Controls and Dimming	
Luminous Flux (Nom)	330 lm	Dimmable	No
Beam Description	-	Product Data	
Color Designation	Medical	Full product code	871150064302540
Lumen Maintenance 2000 h (Nom)	85 %	Order product name	TL 20W/52 SLV/25
Lumen Maintenance 5000 h (Nom)	75 %	EAN/UPC - Product	8711500643025
Chromaticity Coordinate X (Nom)	154	Order code	928003505203
Chromaticity Coordinate Y (Nom)	69		

Medical Therapy Jaundice TL/TL-D


Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928003505203

Net Weight (Piece)	156.000 g
--------------------	-----------

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



Dimensional drawing

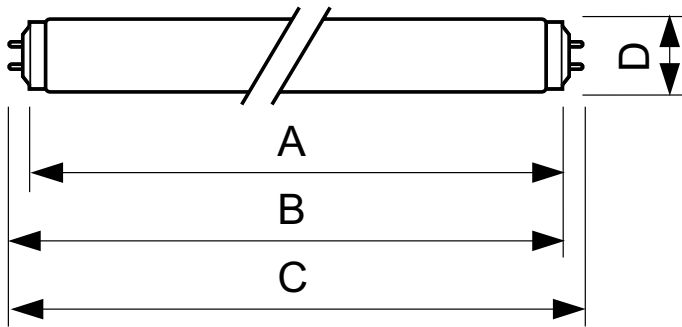

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL 20W/52 SLV/25	40.5 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

TL 20W/52

Photometric data

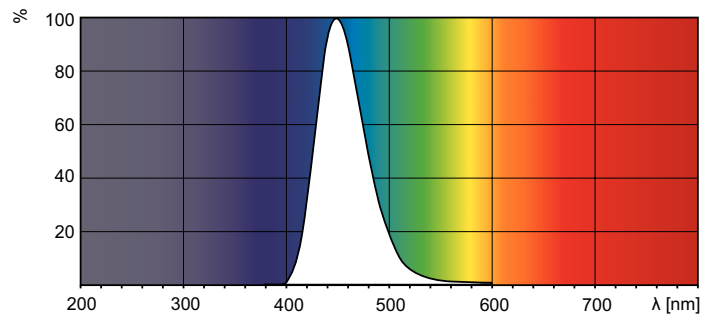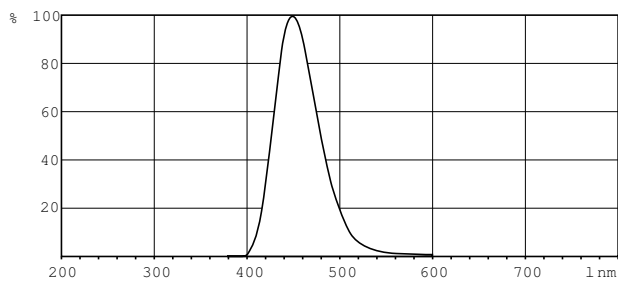

Lightcolor /52

Lightcolor /52

